

IP/ PoE Extender

# User Manual

---

Model : RP-EC500K

Ethernet over CAT5e Extender



## Introduction

**RP-EC500K** is an IP extender that can use a single CAT5e (or greater) cable to send TCP/IP signal to a remote IP-enabled device, with transmission distance up to 800M and bandwidth up to 100Mbps. Furthermore, the high bandwidth allows RP-EC500K to send multiple IP signals over one Ethernet cable and split these signals for different IP devices. It's perfect solution for CCTV security system to extend IP cameras to a remote NVR for recording.

## Features

- Signal Extension up to 800M over CAT5e.
- Bandwidth up to 70Mbps.
- Able to send multiple IP signals over single Ethernet cable.
- Supports Auto MDI/MDI-X and full/ half duplex mode.
- Built-in 1.5KV (Line to Line) surge protection.

## Transmission Distance Chart

The transmission distance report below is tested through the COMMSCOPE 57535-2 (CAT5e 24AWG) cables.

Mode	Data Rate	Transmission Distance
100BASE-TX	100Mbps	<b>130M</b>
100BASE-T1	100Mbps	<b>300M</b>
Long Reach 100	100Mbps	<b>500M</b>
10BASE-T	10Mbps	<b>250M</b>
Long Reach 10	10Mbps	<b>800M</b>


※ The distance may vary by installation conditions, quality of cables, and the performance of connecting devices.

※ 10BASE-T / 100BASE-TX and Long Reach 100Mbps mode use 2 pair wire to transmit

※ 100BASE-T1 and Long Reach 10Mbps mode use 1 pair wire to transmit only

## Installation View


### (1) Point to Point Transmission

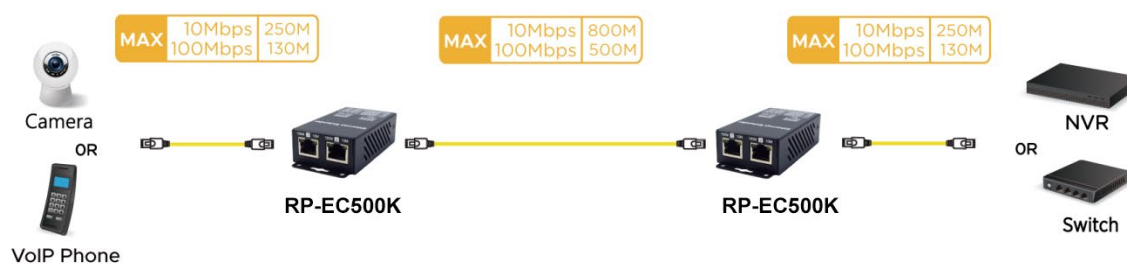


### (2) Multi-Camera Video Transmission



### (3) Wifi Access Point Extending Transmission

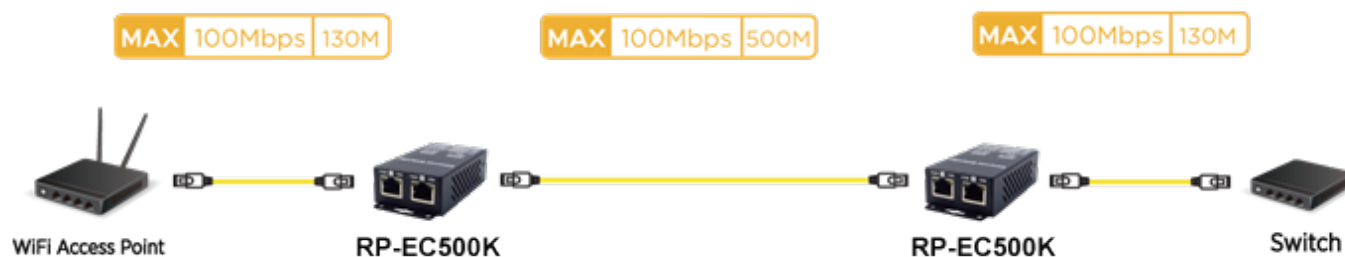


#### (4) Extra Long Distance Transmission

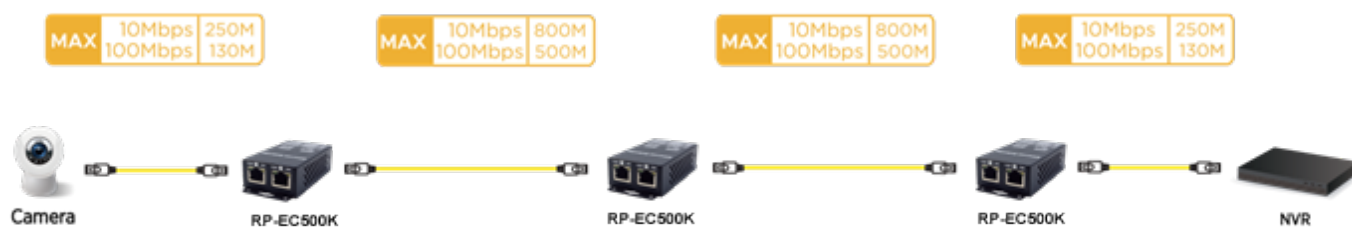

#### (5) Extra Long HDMI Transmission



#### Panel Review

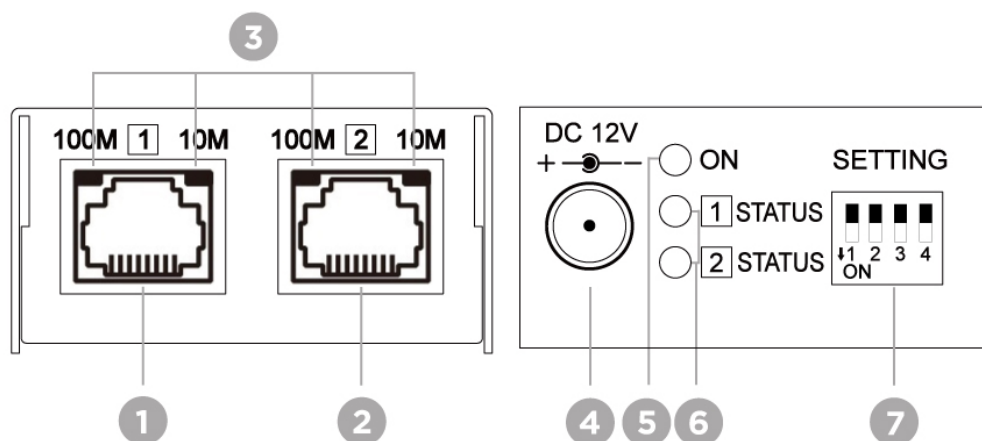


No.	Interface	Functionality
1	RJ45 Connector	Port 1 ; To connect networking devices or another RP-EC500K (Refer to Description 1,2,3)
2	RJ45 Connector	Port 2 ; To connect networking devices or another RP-EC500K (Refer to Description 1,2,3)
3	RJ45 LED	To indicate the network connection status (Refer to Description 4)
4	Power Jack	To connect DC12V 0.5A adapter
5	Power LED Indication	To indicate the power status (Refer to Description 5)
6	Status Indication	<div> <div></div> Status : Port 1 mode indication (Refer to Description 6) </div> <div> <div></div> Status : Port 2 mode indication (Refer to Description 6) </div>
7	DIP Switch	To select the desired mode (Refer to Description 7)

## Description

- Link speed of port 1 and 2 must be sync, or they are not able to activate network connection.
- Once the port 1 and 2 remain unlinked, the RP-EC500K will automatically turn to Power Saving mode.
- RJ45 Pinout

(PIN TIA/EIA-568B)	
PIN	Wire Color
1	Orange-white
2	Orange
3	Green-white
4	Blue
5	Blue-white
6	Green
7	Brown-white
8	Brown

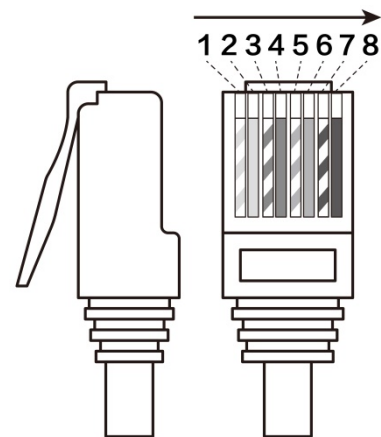

- RJ45 LED

Data Rate	LED On	LED Off	LED Blinking
100Mbps	Enable	Disable	Data Transferring
10Mbps	Enable	Disable	Data Transferring

- Power LED Indication


Green On	Green Off	Light Breathing
Power On	Power Off	Power Saving

## 6. Status Indication

Blue On	Blue Off	Light Blinking	Blink twice
Long Reach	Ethernet	100BaseT-T1	Hardware Failure

## 7. Dip Switch Setting:


## 7.1. Auto Mode / Default (Highly Recommended)



Dip switch 1-2-3-4 all up (OFF)

Auto Mode enable auto negotiation which automatically set up the link speed and transmission protocol.

## 7.2 Auto+EEE Mode



Dip switch 1 down (ON), 2-3-4 up (OFF)

Auto+EEE mode supports Energy-Efficient Ethernet based on Auto Mode.

## 7.3 Advanced Mode

Please refer to the chart below to manually set up the Link Speed, and Modes

No.	Mode	↑ OFF	↓ ON
1	LINK SPEED	10Mbps	100Mbps
2	ETHERNET	Disable	Enable
3	100BASE-T1	Disable	Enable
4	LONG REACH	Disable	Enable

※Link speed of 10Mbps is not supported on 100BASE-T1 mode

## Auto-Negotiation Priority

Priority	Mode
1 (Highest)	Long Distance 100Mbps
2	100BASE-T1
3	Long Distance 10Mbps
4	100BASE-TX Full Duplex
5	100BASE-TX Half Duplex
6	10BASE-T Full Duplex
7 (Lowest)	10BASE-T Half Duplex

## **RP-EC500K Package Included**

2 x RP-EC500K.

2 x DC12V 0.5A Power Adapter.

4 x Screw

4 x Screw Plug

## Specification

ITEM NO.	RP-EC500K
Support	
Compliance	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet IEEE 802.3bw 100BASE-T1 Ethernet IEEE 802.3 Nway Auto-Negotiation IEEE 802.3x Full Duplex Operation And Flow Control IEEE 802.3az Energy Efficient Ethernet
Network Bandwidth	10/ 100Mbps
Max. Transmission Distance	800M at 10Mbps, 500M at 100Mbps
Ports & Interfaces	
Input	1 x RJ45
Output	1 x RJ45
Power Interface	2 x (2mm) DC Jack
Power	
Power Supply	DC 12V 500mA Regulated
Power Consumption	1W (Max)
Ambient Temperature	
Operation	0 to 55°C
Storage	-20 to 85°C
Humidity	Up to 95%
Physical Characteristics	
Dimensions	49 x 91.8 x 25mm
Weight	120g