

## RP-G2610I

### **8-P Gigabit + 2-TP/SFP (100/1G) combo L2+ Managed Switch**

RP-G2610I is a 10-port Managed Gigabit Switch which delivers 8 (10M/100M/1G) RJ45 ports, 2 Combo GbE RJ45/SFP ports and RJ45 Console port.

RP-G2610I offers full suite of comprehensive Layer 2 switching capabilities such as ACL, Spanning Tree, DHCP Relay, IGMP QoS functions ... etc., and provides advanced L3 features like Static Route and IPv6 / IPv4 management functions. The switch provides a reliable infrastructure for your business network and delivers more intelligent features you need to improve the availability of your critical business applications, it protects your sensitive information, and optimizes your network bandwidth to deliver information and applications more effectively. RP-G2610I provides the ideal combination of affordability and capabilities for small- and medium-size businesses which demands IP Phone, IP Camera or Wireless applications, thus helps you create a more efficient, better-connected workforce.

RP-G2610I complies with 802.3az, the green feature enables the switch to automatically detect the length of connected Ethernet cables and adjust power usage accordingly. RP-G2610I comes in a fanless design that ensures silent operation in environments.



## Features

- Support IPv4/IPv6 dual stack management
- Support SSH/SSL secured management
- Support SNMP v1/v2c/v3
- Support RMON groups 1,2,3,9
- Support sFlow
- Support IGMP v1/v2/v3 Snooping
- Support MLD v1/v2 Snooping
- Support RADIUS and TACACS+ authentication
- Support IP Source Guard
- Support DHCP Relay (Option 82)
- Support DHCP Snooping
- Support ACL and QCL for traffic filtering
- Support 802.1d(STP), 802.1w(RSTP) and 802.1s(MSTP)
- Support LACP and static link aggregation
- Support Q-in-Q double tag VLAN
- Support GVRP dynamic VLAN
- IEEE 802.3az EEE Energy Efficient Ethernet standard for green Ethernet
- Fanless design


## Specifications

<b>Standards</b>	<ul style="list-style-type: none"> <li>● IEEE 802.3 10Base-T Ethernet (twisted-pair copper)</li> <li>● IEEE 802.3u 100Base-TX Ethernet (twisted-pair copper)</li> <li>● IEEE 802.3ab 1000Base-T Ethernet (twisted-pair copper)</li> <li>● IEEE 802.3z 1000Base-X Ethernet</li> <li>● IEEE 802.3x Flow Control capability</li> <li>● IEEE802.3az Energy Efficient Ethernet</li> </ul>
<b>Interface</b>	<ul style="list-style-type: none"> <li>● Port 1 to 8: RJ-45 10/100/1000Mbps, auto MDI/X</li> <li>● Port 9 to 10: RJ45/SFP(100/1000Mbps) combo</li> <li>● RJ-45 Console port</li> <li>● Reset Button</li> </ul>
<b>Forwarding Capacity</b>	<ul style="list-style-type: none"> <li>● 14.88 Mpps</li> </ul>
<b>Switching Capacity</b>	<ul style="list-style-type: none"> <li>● 20 Gbps</li> </ul>
<b>Jumbo frames</b>	<ul style="list-style-type: none"> <li>● 9216 Bytes</li> </ul>
<b>MAC Table</b>	<ul style="list-style-type: none"> <li>● 8K MAC addresses</li> </ul>
<b>Layer 2 Switching</b>	
<b>Spanning Tree Protocol (STP)</b>	<ul style="list-style-type: none"> <li>● Standard Spanning Tree 802.1d</li> <li>● Rapid Spanning Tree (RSTP) 802.1w</li> <li>● Multiple Spanning Tree (MSTP) 802.1s</li> </ul>
<b>Trunking</b>	<ul style="list-style-type: none"> <li>● Link Aggregation Control Protocol (LACP) IEEE 802.3ad <ul style="list-style-type: none"> <li>■ Up to 5 groups</li> <li>■ Up to 2 ports per group</li> </ul> </li> </ul>
<b>VLAN</b>	<ul style="list-style-type: none"> <li>● Support up to 4K VLANs simultaneously (out of 4096 VLAN IDs) <ul style="list-style-type: none"> <li>■ Port-based VLAN</li> <li>■ 802.1Q tag-based VLAN</li> <li>■ MAC-based VLAN</li> <li>■ Management VLAN</li> <li>■ Private VLAN Edge (PVE)</li> <li>■ Q-in-Q (double tag) VLAN</li> <li>■ Voice VLAN</li> <li>■ GARP VLAN Registration Protocol (GVRP)</li> </ul> </li> </ul>
<b>DHCP Relay</b>	<ul style="list-style-type: none"> <li>● Relay of DHCP traffic to DHCP server in different VLAN.</li> <li>● Works with DHCP Option 82</li> </ul>
<b>IGMP v1/v2/v3 snooping</b>	<ul style="list-style-type: none"> <li>● IGMP limits bandwidth-intensive multicast traffic to only the requesters</li> <li>● Supports 1024 multicast groups</li> </ul>
<b>IGMP Querier</b>	<ul style="list-style-type: none"> <li>● IGMP querier is used to support a Layer 2 multicast domain of snooping switches in the absence of a multicast router</li> </ul>
<b>IGMP Proxy</b>	<ul style="list-style-type: none"> <li>● IGMP snooping with proxy reporting or report suppression actively filters IGMP packets in order to reduce load on the multicast router</li> </ul>
<b>MLD v1/v2 snooping</b>	<ul style="list-style-type: none"> <li>● Deliver IPv6 multicast packets only to the required receivers</li> </ul>
<b>Layer 3 Switching</b>	
<b>IPv4 Static Routing</b>	<ul style="list-style-type: none"> <li>● IPv4 Unicast: Static routing</li> </ul>
<b>IPv6 Static Routing</b>	<ul style="list-style-type: none"> <li>● IPv6 Unicast: Static routing</li> </ul>
<b>Security</b>	
<b>Secure Shell (SSH)</b>	<ul style="list-style-type: none"> <li>● SSH secures Telnet traffic in or out the switch, SSH v1 and v2 are supported</li> </ul>
<b>Secure Sockets Layer (SSL)</b>	<ul style="list-style-type: none"> <li>● SSL Support: Encrypts the http traffic, allowing advance secure access to the browser-based management GUI in the switch</li> </ul>
<b>IEEE 802.1X</b>	<ul style="list-style-type: none"> <li>● IEEE802.1X: RADIUS authentication, authorization and accounting, MD5 hash, guest VLAN , single/multiple host mode and single/multiple sessions</li> </ul>

	<ul style="list-style-type: none"> <li>● Supports IGMP-RADIUS based 802.1X</li> <li>● Dynamic VLAN assignment</li> </ul>
<b>Layer 2 Isolation Private VLAN Edge (PVE)</b>	<ul style="list-style-type: none"> <li>● PVE (also known as protected ports) provides L2 isolation between clients in the same VLAN. Supports multiple uplinks</li> </ul>
<b>Port Security</b>	<ul style="list-style-type: none"> <li>● Locks MAC addresses to ports, and limits the number of learned MAC addresses</li> </ul>
<b>IP Source Guard</b>	<ul style="list-style-type: none"> <li>● Prevents illegal IP address from accessing to specific port in the switch</li> </ul>
<b>RADIUS/ TACACS+</b>	<ul style="list-style-type: none"> <li>● Supports RADIUS and TACACS+ authentication. Switch as a client</li> </ul>
<b>Storm control</b>	<ul style="list-style-type: none"> <li>● Prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on a port</li> </ul>
<b>DHCP Snooping</b>	<ul style="list-style-type: none"> <li>● A feature acts as a firewall between untrusted hosts and trusted DHCP servers</li> </ul>
<b>ACLs</b>	<ul style="list-style-type: none"> <li>● Supports up to 256 entries. Drop or rate limitation based on: <ul style="list-style-type: none"> <li>■ Source and destination MAC, VLAN ID or IP address, protocol, port</li> <li>■ Differentiated services code point (DSCP) / IP precedence</li> <li>■ TCP/ UDP source and destination ports</li> <li>■ 802.1p priority</li> <li>■ Ethernet type</li> <li>■ Internet Control Message Protocol (ICMP) packets</li> <li>■ TCP flag</li> </ul> </li> </ul>
<b>Quality of Service</b>	
<b>Hardware Queue</b>	<ul style="list-style-type: none"> <li>● Support 8 hardware queues</li> </ul>
<b>Scheduling</b>	<ul style="list-style-type: none"> <li>● Strict priority and weighted round-robin (WRR)</li> <li>● Queue assignment based on DSCP and class of service</li> </ul>
<b>Classification</b>	<ul style="list-style-type: none"> <li>● Port based</li> <li>● 802.1p VLAN priority based</li> <li>● IPv4/IPv6 precedence / DSCP based</li> <li>● Differentiated Services (DiffServ)</li> <li>● Classification and re-marking ACLs</li> </ul>
<b>Rate Limiting</b>	<ul style="list-style-type: none"> <li>● Ingress policer</li> <li>● Egress shaping and rate control</li> <li>● Per port</li> </ul>
<b>Management</b>	
<b>DHCP Server</b>	<ul style="list-style-type: none"> <li>● Support DHCP server to assign IP to DHCP clients</li> </ul>
<b>Remote Monitoring (RMON)</b>	<ul style="list-style-type: none"> <li>● Embedded RMON agent supports RMON groups 1,2,3,9 (history, statistics, alarms, and events) for enhanced traffic management, monitoring and analysis</li> </ul>
<b>Port mirroring</b>	<ul style="list-style-type: none"> <li>● Traffic on a port can be mirrored to another port for analysis with a network analyzer or RMON probe. Up to N-1 (N is Switch's Ports) ports can be mirrored to single destination port. A single session is supported</li> </ul>
<b>UPnP</b>	<ul style="list-style-type: none"> <li>● The Universal Plug and Play Forum, an industry group of companies working to enable device-to-device interoperability by promoting Universal Plug and Play</li> </ul>
<b>s-Flow</b>	<ul style="list-style-type: none"> <li>● The industry standard for monitoring high speed switched networks. It gives complete visibility into the use of networks enabling performance optimization, accounting/billing for usage, and defense against security threats</li> </ul>
<b>IEEE 802.1ab (LLDP)</b>	<ul style="list-style-type: none"> <li>● Used by network devices for advertising their identities, capabilities, and neighbors on an IEEE 802ab local area network</li> <li>● Support LLDP-MED extensions</li> </ul>
<b>Web GUI Interface</b>	<ul style="list-style-type: none"> <li>● Built-in switch configuration utility for browser-based device configuration</li> </ul>
<b>CLI</b>	<ul style="list-style-type: none"> <li>● For users to configure/manage switches in command line modes</li> </ul>

<b>Dual Image</b>	<ul style="list-style-type: none"> <li>• Independent primary and secondary images for backup while upgrading</li> </ul>
<b>SNMP</b>	<ul style="list-style-type: none"> <li>• SNMP version1, 2c and 3 with support for traps, and SNMP version 3 user-based security model (USM)</li> </ul>
<b>Firmware Upgrade</b>	<ul style="list-style-type: none"> <li>• Web browser upgrade (HTTP/ HTTPS) and TFTP</li> <li>• Upgrade through console port as well</li> </ul>
<b>NTP</b>	<ul style="list-style-type: none"> <li>• Network Time Protocol (NTP) is a networking protocol for clock synchronization between computer systems over packet-switched</li> </ul>
<b>Other Management</b>	<ul style="list-style-type: none"> <li>• HTTP/HTTPS; SSH</li> <li>• DHCP Client/ DHCPv6 Client</li> <li>• Cable Diagnostics</li> <li>• Ping</li> <li>• Syslog</li> <li>• Telnet Client</li> <li>• IPv6 Management</li> </ul>
<b>Power Supply</b>	<ul style="list-style-type: none"> <li>• Internal Power supply 100~240VAC, 50/60 Hz</li> </ul>
<b>Environment</b>	<ul style="list-style-type: none"> <li>• Operating temperature: 0°C to 45°C</li> <li>• Storage Temperature: -20 to 70°C</li> <li>• Operating Humidity: 10% to 90% (Non-Condensing)</li> </ul>
<b>Dimension</b>	<ul style="list-style-type: none"> <li>• 220 x 44 x 134mm (WxHxD)</li> </ul>
<b>Certification</b>	<ul style="list-style-type: none"> <li>• FCC, CE</li> </ul>

## Application

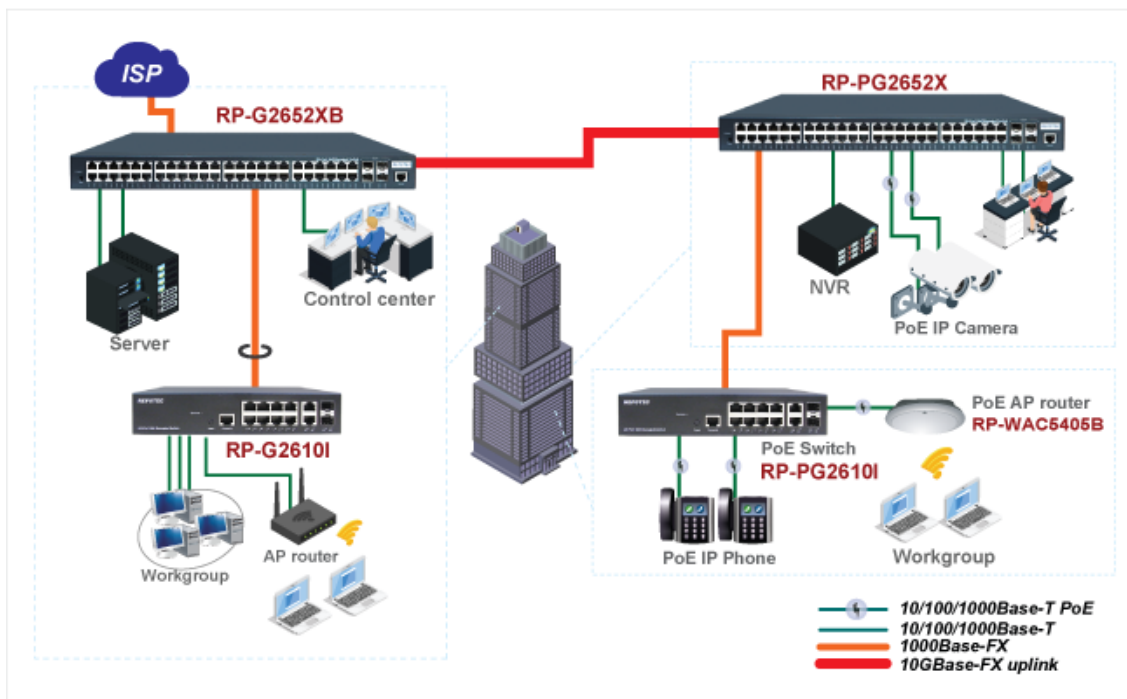

## Ordering information

**RP-G2610I** 8-P Gigabit + 2-TP/SFP(100/1G) combo L2+ Managed Switch

**REPOTEC CO., LTD.**

3F., No.258, Liancheng Rd., Zhonghe District., New Taipei City 235, Taiwan

TEL: 886-2-8227-1888 FAX: 886-2-8227-1818