

The Advanced Networking Technology



RP-PG83480I-4F

48-P Gigabit + 4-SFP (1G/2.5G) slot L2+ Managed PoE Switch



RP-PG83480I-4F is a Layer 2+ managed PoE switch. It offers 48 gigabit PoE ports and 4 1G/2.5G slots and delivers PoE power budget up to 740W. The switch provides full Gigabit access and exceptional scalability, offering impressive 2G performance. With a switching capacity of 144Gbps, it delivers high-density performance and includes Layer 3 static routing capabilities.

RP-PG83480I-4F provides comprehensive end to end QoS as well as flexible and rich management, security settings, which can meet the high speed, secure and smart requirement for small and medium-size enterprise networks based on cost effective price. The powerful network security features make the RP-PG83480I-4F perform effective data traffic control for ISP and enterprise VoIP, video streaming, and multicast applications.

RP-PG83480I-4F excels in network security, enabling effective data traffic control for Internet Service Providers (ISPs) and enterprises. It efficiently manages VoIP, video streaming, and multicast applications. For SMBs looking to deploy Power over Ethernet networks or enhance data security and network traffic management, the switch offers an affordable, safe, and reliable power solution.

Features

- Supports IPv4/IPv6 static routing, DHCP server
- Supports GE , 2.5GE port aggregation, static and dynamic aggregation
- Supports access, truck , hybrid mode and VLAN classification, including the Mac based VLAN, IP based VLAN and protocol based VLAN
- Supports port-based, VLAN-based and flow-based QinQ
- Supports STP, RSTP, MSTP, G.8032 ERPS protocol, single ring, sub ring
- Multicast: Supports IGMP snooping
- QoS class, remarking, Supports SP, WRR queue scheduling, Ingress/Engress port-based rate-limit and policy-based QoS
- Support Dot1x , port authentication , mac authentication , RADIUS service; Support port-security, ip source guard , IP/Port/MAC binding, arp-check and ARP packet filtering for illegal users and port isolation
- Supports LLDP, user management and login authentication; SNMPV1/V2C/V3; web management , HTTP1.1 , HTTPS; Syslog and alarm grading ; RMON
- Firmware update, configure backup/restore through Web GUI, FTP and TFT


Specifications

Standards	<ul style="list-style-type: none"> IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE 802.3x Flow Control and Back Pressure IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1Q VLAN ITU-T G.8032 ERPS IEEE 802.1X Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3ad LACP IEEE 802.3af PoE IEEE 802.3at PoE+
Interface	<ul style="list-style-type: none"> 48 x 10/100/1000Base-T RJ45 PoE ports 4 x 1G/2.5GBase-X SFP
Management port	<ul style="list-style-type: none"> 1 x RJ45 Console port
PoE	<ul style="list-style-type: none"> Complies with IEEE 802.3at, IEEE802.3af standard. Max output power per port can reach 30W(PoE+) Support 1/2(+)/3/6(-) Endspan Support Non-standard PD
Switching capacity	<ul style="list-style-type: none"> 144Gbps
Packet forwarding rate	<ul style="list-style-type: none"> 172.6 Mpps
MAC address table	<ul style="list-style-type: none"> 16K
Buffer	<ul style="list-style-type: none"> 12M bit
Layer 2 function	
Port aggregation	<ul style="list-style-type: none"> Support gigabit port, 2.5GE port aggregation Support static and dynamic aggregation
Port features	<ul style="list-style-type: none"> Support IEEE802.3x flow control, Port traffic statistics, port isolation Support network storm suppression based on port bandwidth percentage
VLAN	<ul style="list-style-type: none"> Support access, trunk and hybrid mode
VLAN Classification	<ul style="list-style-type: none"> Mac Based VLAN IP Based VLAN Protocol Based VLAN
QinQ	<ul style="list-style-type: none"> Basic QinQ (Port-based QinQ) Flexible Q in Q(VLAN-based QinQ) QinQ(Flow-based QinQ)
Port mirroring	<ul style="list-style-type: none"> Many to one (Port Mirroring)
Ring network protocol	<ul style="list-style-type: none"> Support STP、RSTP、MSTP Support G.8032 ERPS protocol, single ring, sub ring and other ring
DHCP	<ul style="list-style-type: none"> DHCP Client

	<ul style="list-style-type: none"> • DHCP Snooping
ARP	<ul style="list-style-type: none"> • ARP table aging
IPv4/IPv6	<ul style="list-style-type: none"> • Static routing
Multicast	<ul style="list-style-type: none"> • IGMP snooping
ACL	<ul style="list-style-type: none"> • IP Standard ACL • MAC extend ACL • IP extend ACL
QoS	<ul style="list-style-type: none"> • Support QoS Class, Remarking • Support SP, WRR queue scheduling • Ingress Port-based Rate-limit • Egress Port-based Rate-limit • Support Policy-based QoS
Security	<ul style="list-style-type: none"> • Support Dot1x, port authentication, MAC authentication, RADIUS service • Support port-security • Support IP Source Guard, IP/Port/MAC binding • Support ARP-check and ARP packet filtering for illegal users • Support port isolation
Management & maintenance	<ul style="list-style-type: none"> • Support LLDP • Support user management and login authentication • Support SNMPV1/V2C/V3 • Support web management, HTTP1.1, HTTPS • Support Syslog and alarm grading • Support RMON(Remote Monitoring) alarm, event and history record • Support NTP • Support temperature monitoring • Support Ping, Tracert • Support optical transceiver DDM function • Support TFTP Client • Support Telnet Server • Support SSH Server • Support IPv6 Management • Support PoE management • Support FTP, TFTP, WEB upgrading
Mechanical structure	
Power supply	<ul style="list-style-type: none"> • VAC input • Rated voltage range: 100-240V • Frequency: 50/60Hz
Fan	<ul style="list-style-type: none"> • Support fan speed control
PoE Power	<ul style="list-style-type: none"> • Total PoE power budget 740W or 400W
Power surge protection	<ul style="list-style-type: none"> • 6KV, IEC 61000-4-5 Level X (8/20us)
Ethernet ports surge protection	<ul style="list-style-type: none"> • 4KV, IEC 61000-4-5 Level 4 (10/700us)
Dimension	<ul style="list-style-type: none"> • 440 x 300 x 44mm (W*D*H)

Environment	<ul style="list-style-type: none"> Operating temperature: 0°C~+50°C Operating Humidity: 10 to 90% (Non-Condensing)
Certification	<ul style="list-style-type: none"> CE/FCC

Dimension

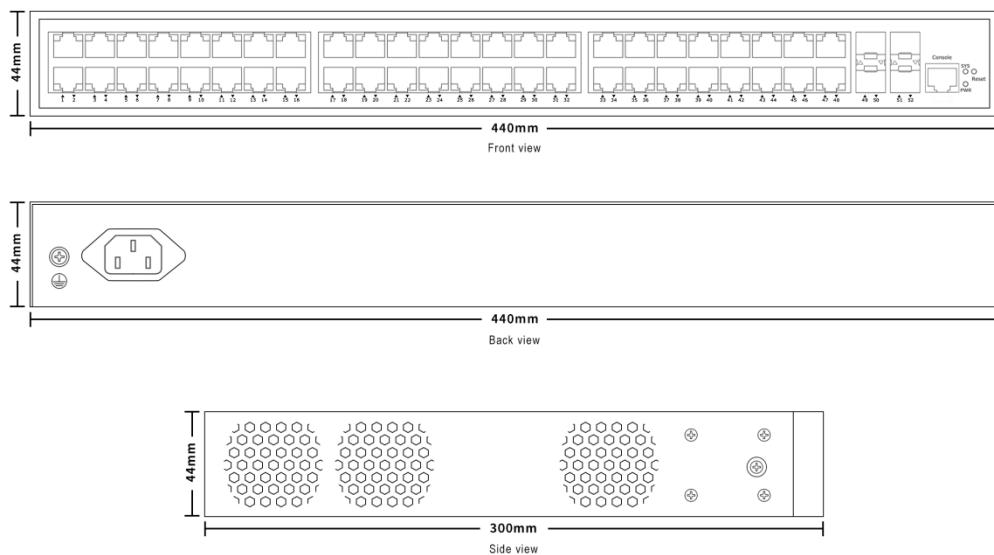

Ordering information

RP-PG83480I-4F/400 48-P Gigabit + 4-SFP(1G/2.5G) slot L2+ Managed PoE Switch (400W)

RP-PG83480I-4F/740 48-P Gigabit + 4-SFP(1G/2.5G) slot L2+ Managed PoE Switch (740W)