


**RP-12MOD1U | RP-16MOD1U
RP-24MOD1U | RP-32MOD2U****Modular Patch Panel**

The modular patch panel is designed to accept modular jacks and connectors, providing the ultimate in multimedia installations. It allows the design of a custom panel specifically suited to different applications including coax, voice, audio, video and fiber. Once the connectors are snapped into the panel, they are flush with the front of the plate. These modular panels can be moved to any standard EIA 19" rack, cabinet or wall mount patch panel bracket.

**Materials****According to TIA/EIA 569 Standard****Unit:** 1 U (12, 16, 24 Ports), 2U (32 Port) for 19" Rack Mount**Metal Case:** 1.6mm thickness metallic**Ordering information**

RP-12MOD1U	1U 19" Modular Patch Panel, 12-port (Stick out type)
RP-16MOD1U	1U 19" Modular Patch Panel, 16-port (Stick out type)
RP-24MOD1U	1U 19" Modular Patch Panel, 24-port (Stick out type)
RP-32MOD2U	2U 19" Modular Patch Panel, 32-port (Stick out type)

PATCH PANEL

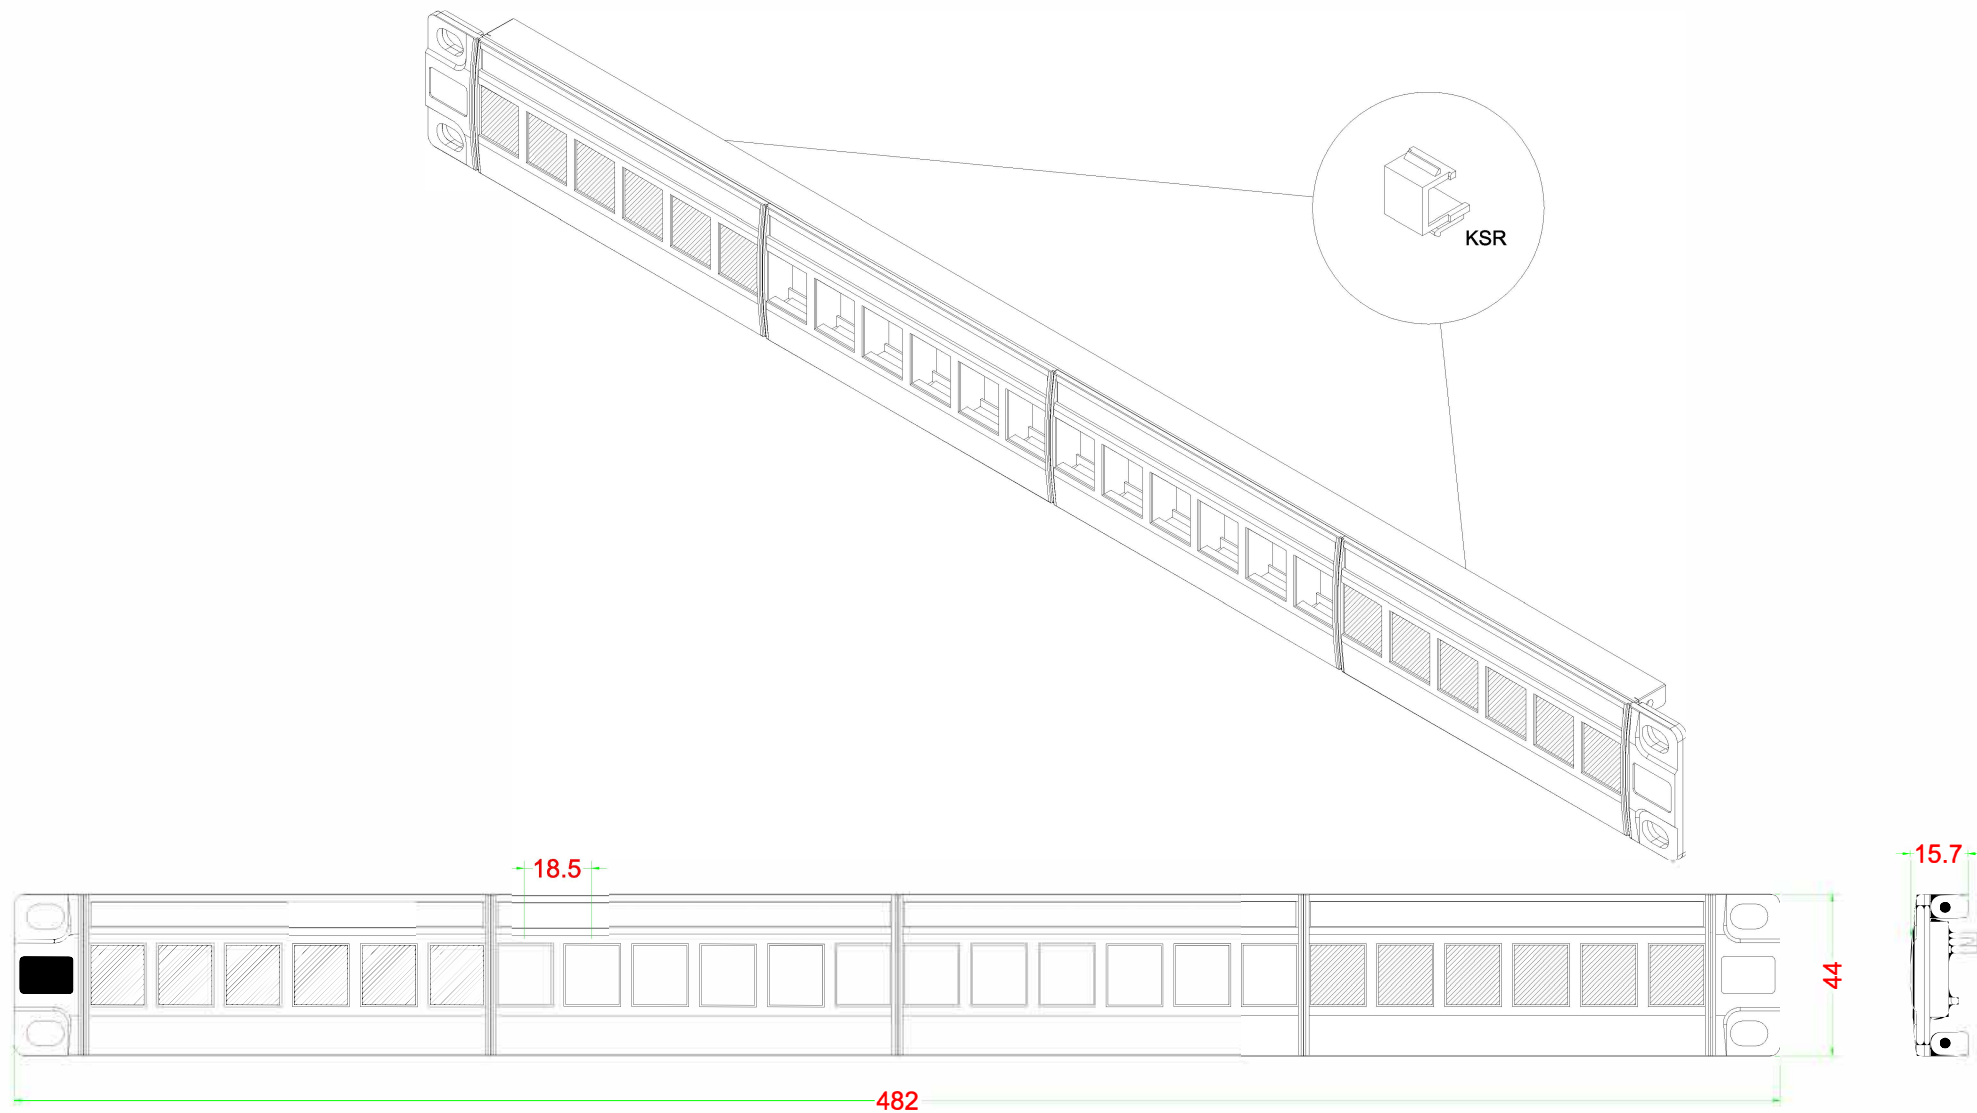


Materials:

Front Plate : Fireproof ABS UL-94V0
Panel : Metal (SPCC)
KSR : Fireproof ABS UL-94V0
Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	RP-12MOD1U
	APPR	CUSTOMER:	
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	X ± 1 · X ± 0.2 · XX ± 0.15

REPOTEC REPOTEC CO., LTD.

PATCH PANEL

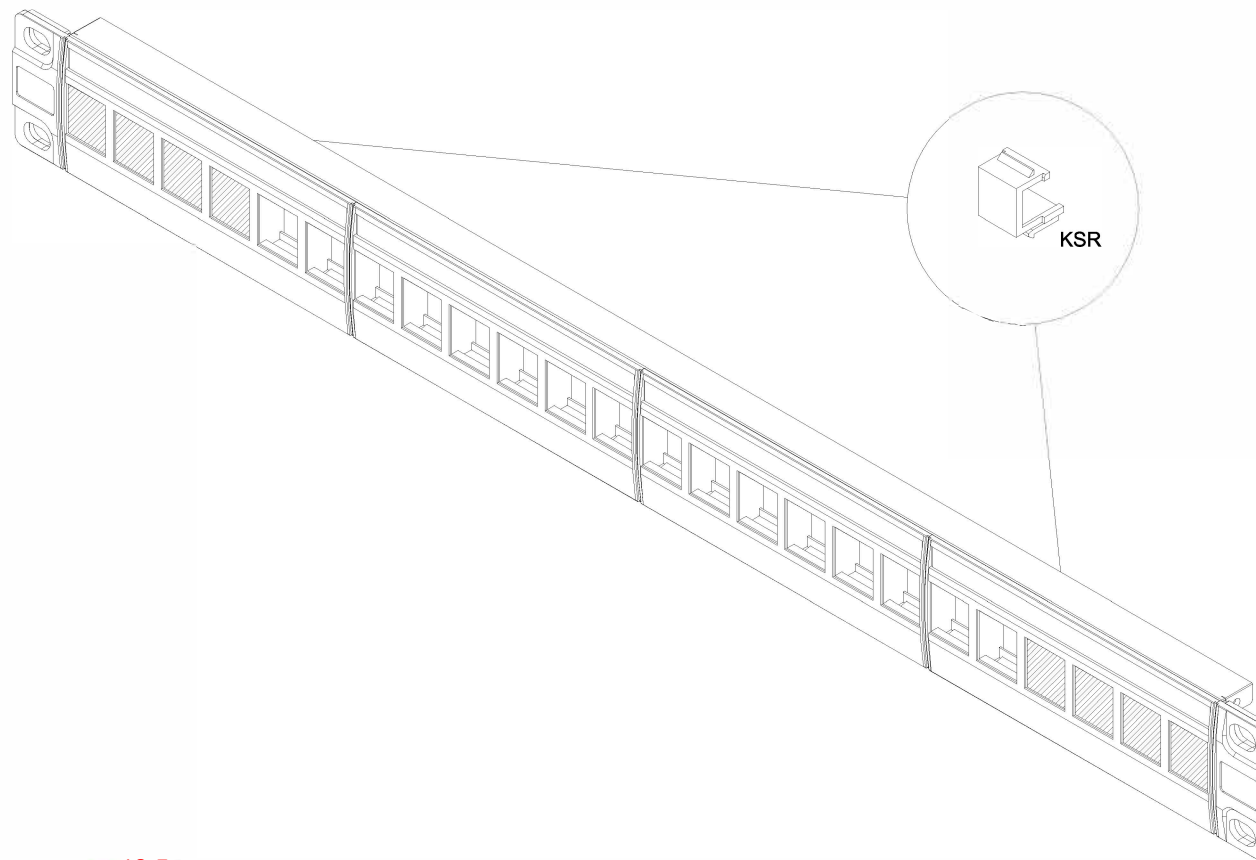


Materials:

Front Plate : Fireproof ABS UL-94V0
Panel : Metal (SPCC)
KSR : Fireproof ABS UL-94V0
Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	RP-16MOD1U
 APPR		CUSTOMER:	
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	X ± 1 · X ± 0.2 · XX ± 0.15

REPOTEC REPOTEC CO., LTD.

PATCH PANEL

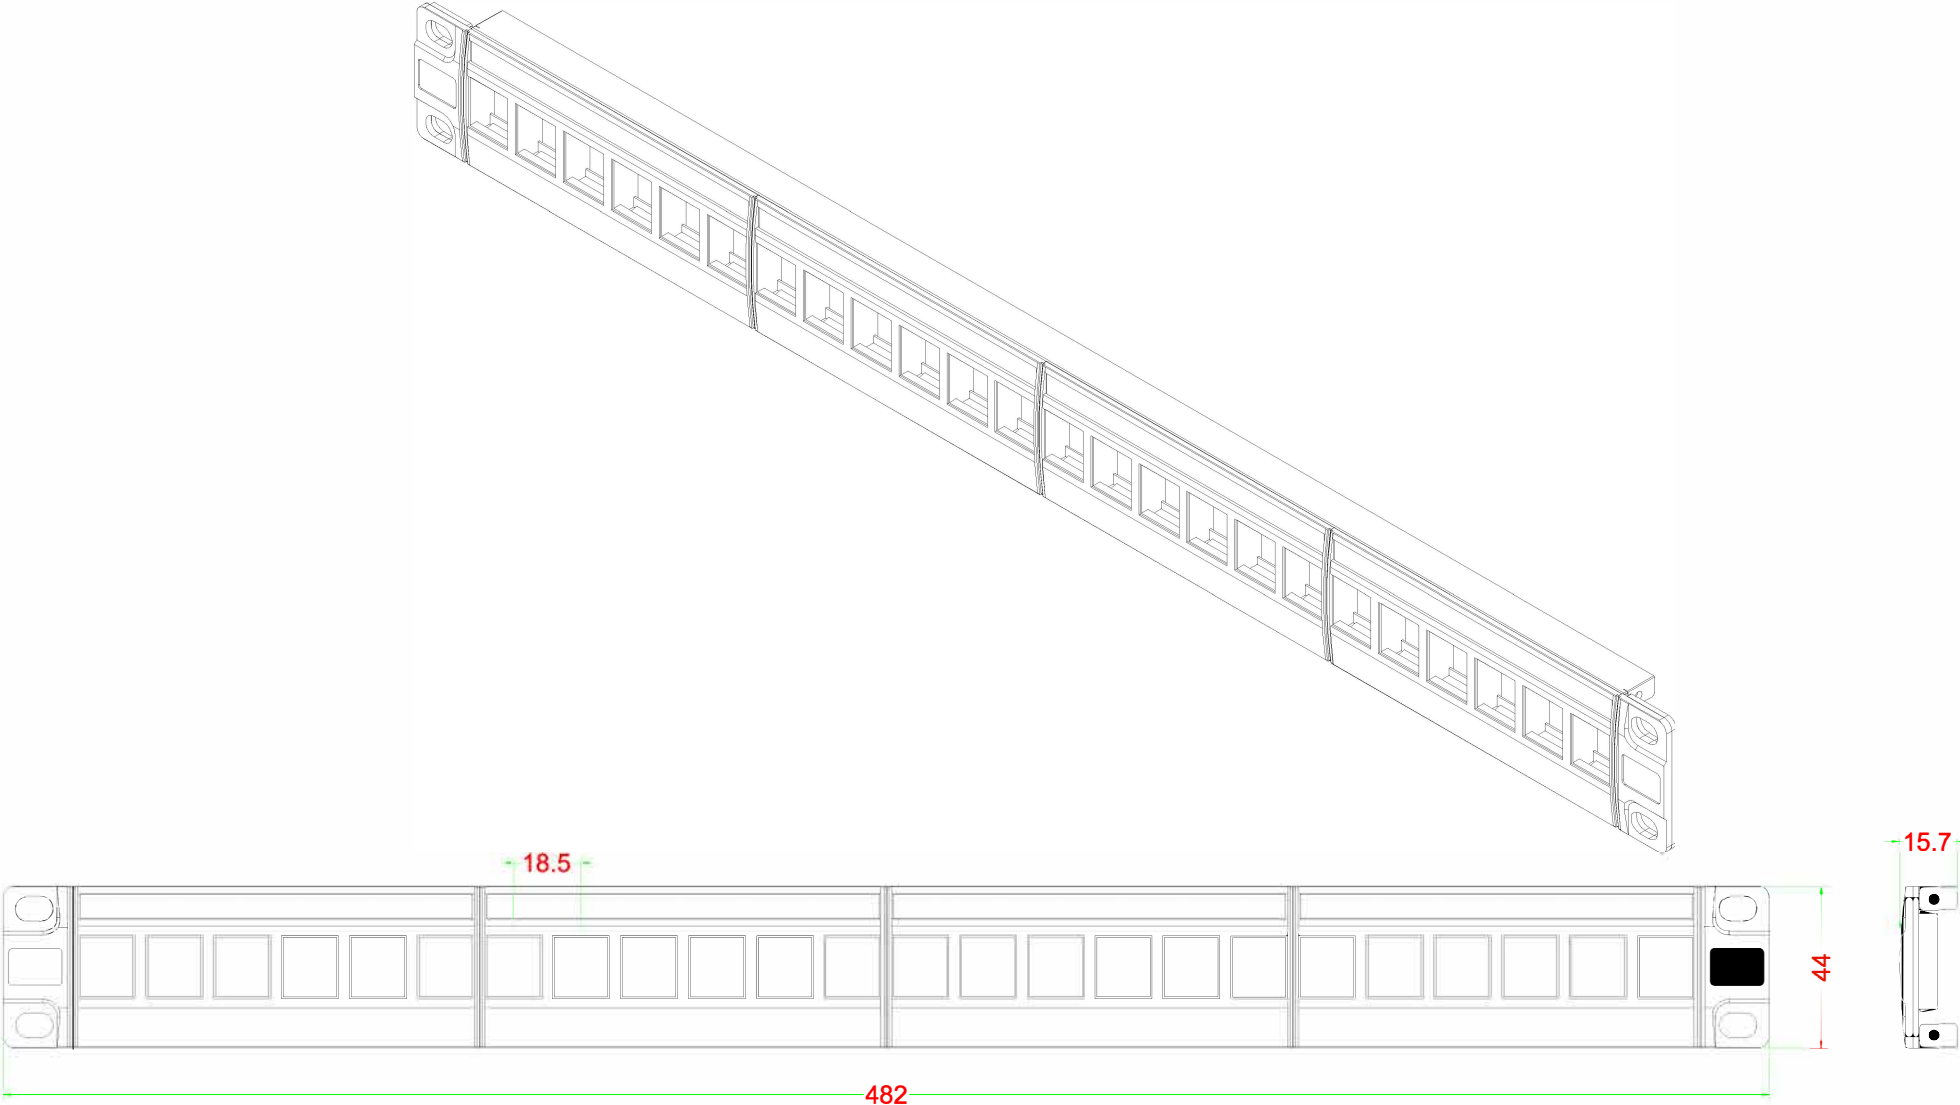

Materials:


Front Plate : Fireproof ABS UL-94V0

Panel : Metal (SPCC)

Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	RP-24MOD1U
 APPR		CUSTOMER:	
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	X ± 1 · X ± 0.2 · XX ± 0.15

PATCH PANEL

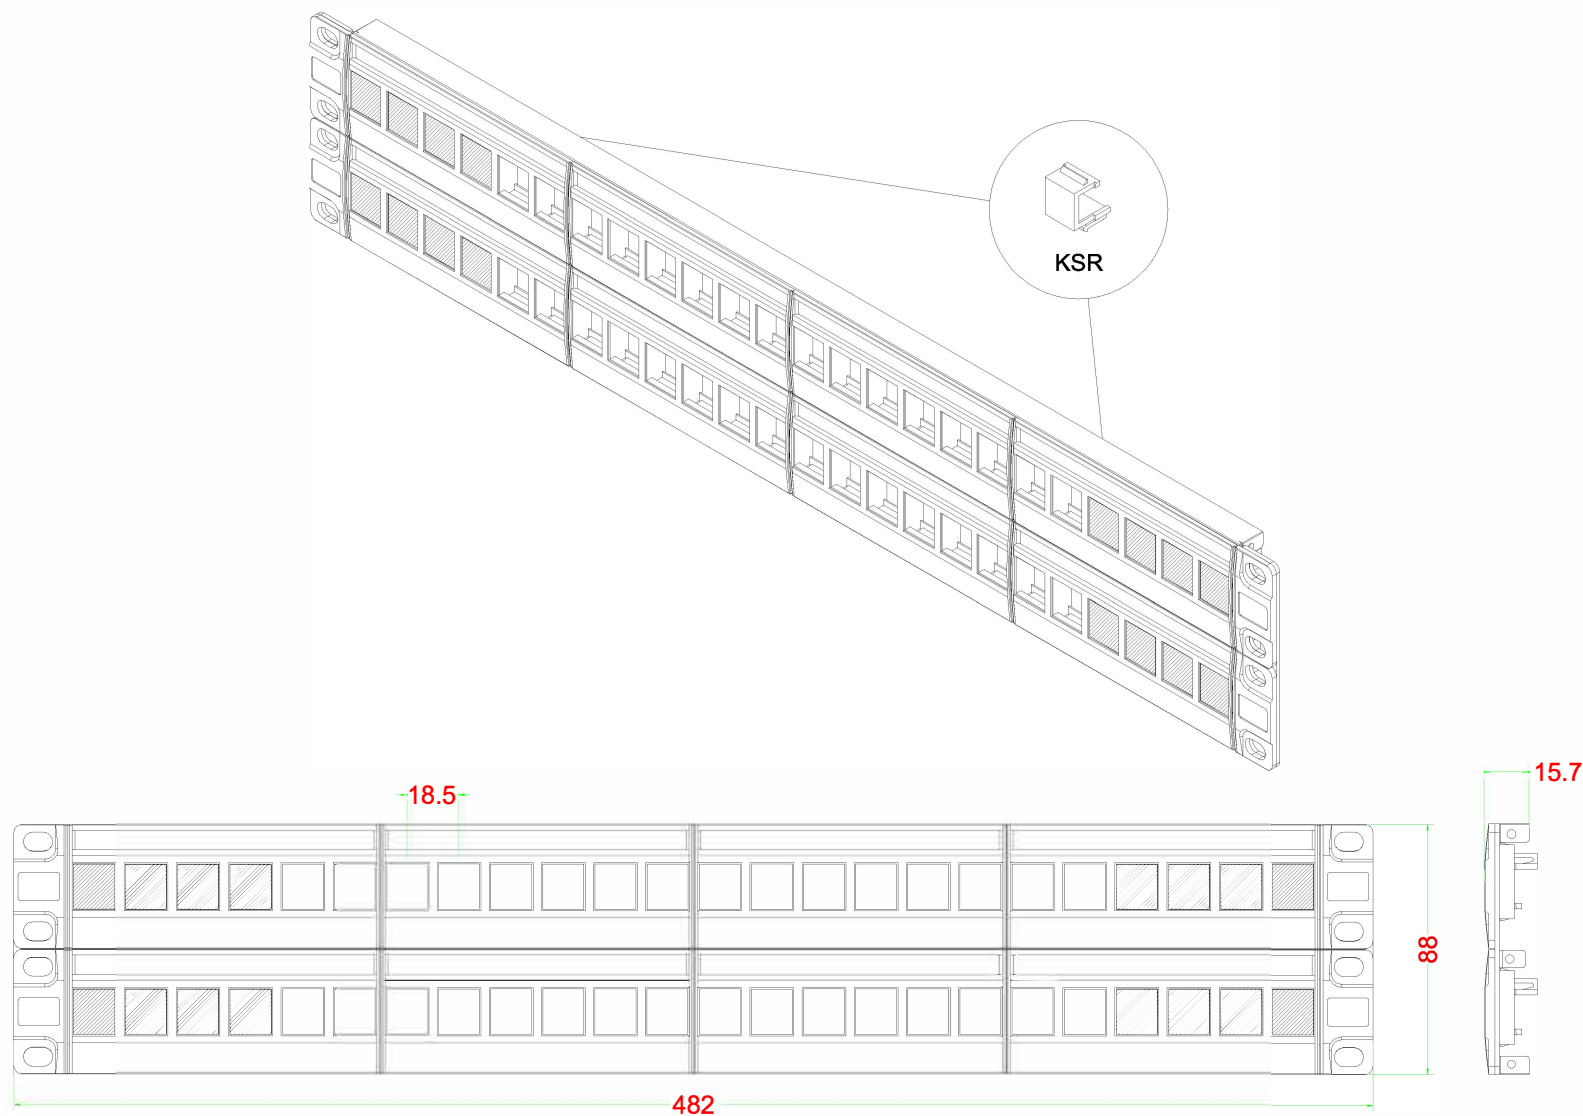

Materials:

Front Plate : Fireproof ABS UL-94V0

Panel : Metal (SPCC)

KSR : Fireproof ABS UL-94V0

Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	RP-32MOD2U
 UNIT:	APPR	CUSTOMER:	
m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	X ± 1 · X ± 0.2 · XX ± 0.15

REPOTEC REPOTEC CO., LTD.