

## RP-UB2801A

### 1-P USB2.0 Fast Ethernet Print Server

RP-UB2801A is equipped with 1\* USB2.0 high speed port for users to share USB printer on Intranet/Internet. The print server allows the printers to be placed in the convenient location and connected directly on the Ethernet network and no need to connect printer with PC.

Moreover, this print server supports the Simple Network Management Protocol (SNMP), which provides remote printer management and-warning notice sending. A standard SNMP agent is permanent on these print servers. Any standard SNMP-based application can be used to access and manage these print servers. The print server provides an embedded web server which can be accessed via web browser, and it also supports subsidiary Windows-based PSAdmin utility which helps administrator to setup print server environment, e.g. Netware, Windows, Mac or Linux system.




### Features

- Windows based Set-up Program, Web-Management, Telnet, HP-JetAdmin
- Support Internet Printing Protocol (IPP)
- Support DHCP-Client
- Support SNMP& HP Web JetAdmin
- Support Firmware Up-grade (TFTP)
- Easy-to-use Setup Wizard

## Specifications

<b>Standards</b>	<ul style="list-style-type: none"> <li>• IEEE 802.3/802.3u</li> </ul>
<b>Interface</b>	<ul style="list-style-type: none"> <li>• 1* USB2.0 (high speed) standard compliant host controller</li> <li>• 1 *RJ-45 10/100Mbps, auto-sensing</li> </ul>
<b>Protocol Support</b>	<ul style="list-style-type: none"> <li>• TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB (over IP), RawTCP 9101,9102,9103</li> </ul>
<b>Data Rate</b>	<ul style="list-style-type: none"> <li>• 10/100Mbps</li> </ul>
<b>Default IP Address</b>	<ul style="list-style-type: none"> <li>• 192.168.0.10 DHCP: OFF</li> </ul>
<b>Management</b>	<ul style="list-style-type: none"> <li>• Web Interface</li> <li>• Windows-based Setup Program</li> </ul>
<b>Software Upgradeable</b>	<ul style="list-style-type: none"> <li>• Web interface</li> <li>• Windows-based Setup Program</li> <li>• TFTP</li> </ul>
<b>LED indicators</b>	<ul style="list-style-type: none"> <li>• Power/Status: Orange</li> <li>• USB Link: Orange for USB1.1, Green for USB2.0</li> <li>• LAN Link: Yellow for 10Mbps, Green for 100Mbps</li> </ul>
<b>Environment</b>	<ul style="list-style-type: none"> <li>• Easy-to-use Setup Wizard</li> <li>• Internet Printing Protocol (IPP) Support</li> <li>• Windows Print Monitor Technology</li> <li>• DHCP (client) Support</li> <li>• SNMP &amp; HP Web JetAdmin Support</li> <li>• Email Alert</li> <li>• Print Job Control/Print Job Status to Print Job Status and Log</li> </ul>
<b>Operate System</b>	<ul style="list-style-type: none"> <li>• Microsoft Windows 9X/ME/NT4 (SP6)/2000 (SP4)/XP (both 32 and 64)/Vista (both 32 and 64)/7 (both 32 and 64), Apple Mac OS 8.x/9.x and 10.2 or higher, Unix/Linux, Novell NetWare 3.12 (Bindery)/4.x (both Bindery and NDS) or higher</li> </ul>
<b>Reset Button</b>	<ul style="list-style-type: none"> <li>• Yes. (Reset, Load factory defaults, Self test page)</li> </ul>
<b>Power Adapter</b>	<ul style="list-style-type: none"> <li>• External Power Adapter DC5V, 2A</li> </ul>
<b>Environment</b>	<ul style="list-style-type: none"> <li>• Operating Temperature: 0°C~50°C</li> <li>• Operating Humidity: 0%~70%</li> </ul>
<b>Dimension</b>	<ul style="list-style-type: none"> <li>• 74 * 63 * 30 mm</li> </ul>
<b>Certifications</b>	<ul style="list-style-type: none"> <li>• FCC, CE</li> </ul>

## Application

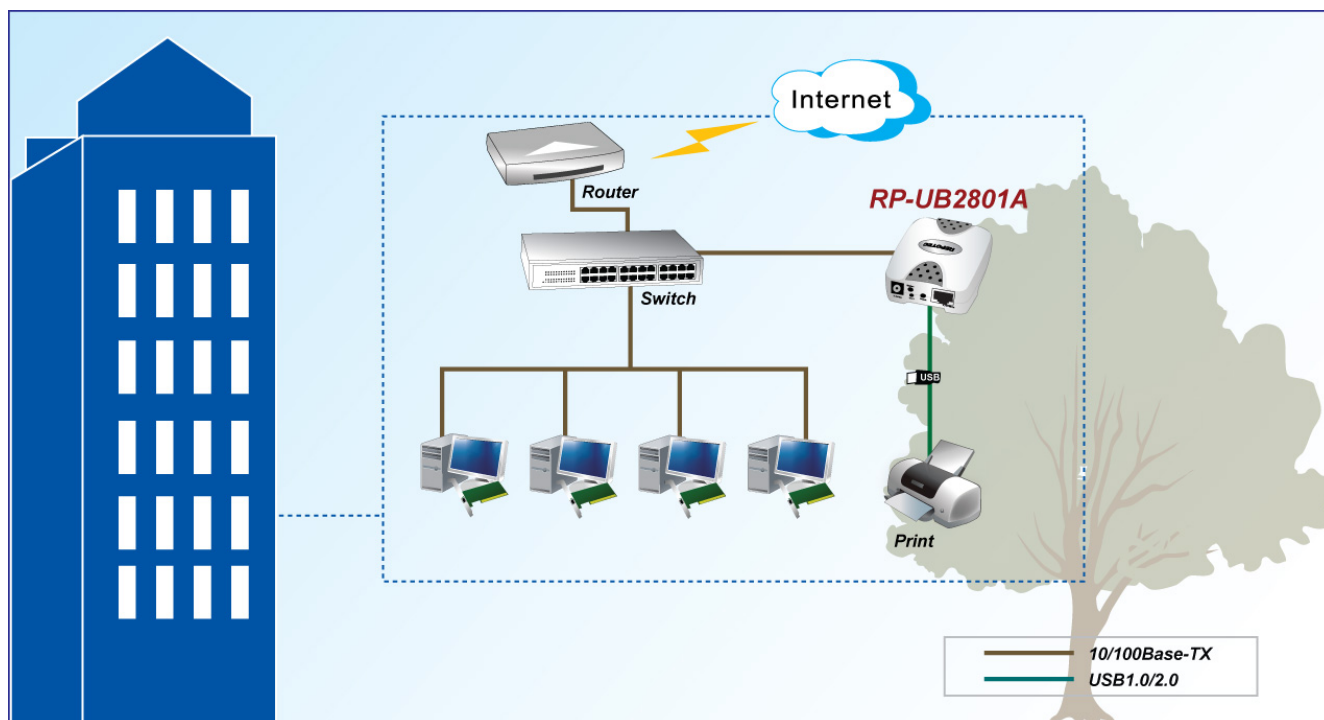

## Ordering information

**RP-UB2801A** 1-P USB2.0 Fast Ethernet Print Server