

I. Brief introduction

Many thanks for purchasing Gigabit Ethernet Switch!
This product supports IEEE802.3ab 1000Base-T and IEEE802.3z 1000Base-X protocols. This manual matches the 5-port 10/100/1000Mbps Ethernet switch with 1-port 1000Base-X features. The following product select guide is for your reference.

II. Packing list

Please check the following items in the package before installing the switch.

- Gigabit Ethernet Switch 1 piece
- AC/DC adapter 1 piece
- User manual 1 copy


Please contact the dealer immediately for any missing or damaged items.

III. Installation

1. Interface

All RJ-45 copper interfaces support Auto-Negotiation for optimal speed detection through RJ-45 CAT5e UTP cables with a maximum length of 100 meters (or 328 feet). They also support standard Auto-MDI/MDI-X that can detect the type of connection to any Ethernet device without requiring special straight or crossover cables.

2. Connection

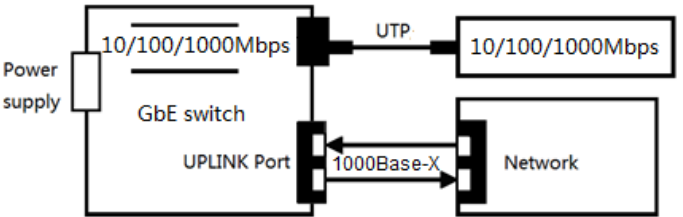

Connect one end of the standard UTP CAT5 network cable to the 10/100/1000Mbps RJ-45 ports on the front panel of the switch. Connect the other of the cable to the typical network devices.

3. Power on

Connect one end of the power adapter to the switch. Connect the power plug of the adapter to a standard wall outlet. When the switch is powered on, the PWR LED should be remain static green. The LED of each port indicates the connection status of corresponding port. (See Table.1 for detailed description)


4. Panel

All link ports and LED indicators are located on the front panel, leaving only Power port on the back panel. The panels as follows pictures:

Front panel



Back Panel

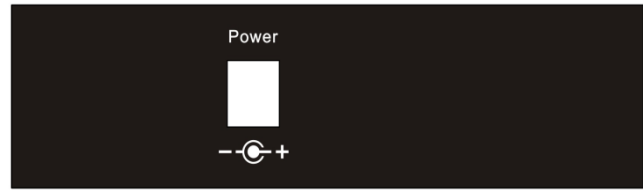

5. LED indicator

The LED indicators serve as device monitoring and error display. Detailed descriptions are summarized in the following table.

LED	Status	Description
PWR	Green	Device active
L/A	Green	Link to port
	OFF	Link failure
	Blink	Data transfer to port
SPD	Amber	Transfer rate is 1000Mbps
	OFF	Transfer rate is 10/100Mbps

IV. Technical parameters:

1. Standard Protocol:
 - IEEE802.3 10Base-T
 - IEEE802.3u100Base-TX
 - IEEE802.3ab1000Base-T
 - IEEE802.3z1000Base-X
 - IEEE802.3x flow control
2. Connectors:
 - 4× UTP RJ-45 connector
 - 1x SFP slot
3. Operation mode:
 - FX: 1000 Base-X Full -duplex mode
 - TX: 10/100/1000 Mbps auto-negotiation mode
4. Power supply:
 - 5VDC ,2A power adaptor
5. Operation temperature: -10°C~60°C
6. Storage temperature: -40°C~85°C
7. Operation humidity: 5%-90% non-condense
8. Storage humidity: 5%-90% non-condense
9. Twisted Pair cable: Cat.5e UTP cable
10. Fiber cable:
 - multi-mode: 50/125, 62.5/125μm
 - single mode: 8.3/125, 9/125 or 10/125μm
11. Dimensions: 30×112×96mm (H x W x D)

V. Warning:

1. This product is suitable for indoor application.
2. Place the dust cover on the fiber interface when not in use.
3. It is dangerous to stare at the fiber transmitter with the naked eye.
4. The appliance inlet is used as the disconnect device and shall remain readily operable at all time.

VI. Trouble shooting:

1. Device is not connecting. Please check that the corresponding network device is using the same transfer rate as the media switch (10Mbps or 100Mbps).
2. If power loss is excessive in the fiber, please check and clean the fiber patch cord connectors.

Gigabit Ethernet Switch

4 X 10/100/1000 Base-T to 1000Base- X

Rev. D 1.0

User's Manual